ROLLER RAIL PLUS

for easy and fast cable drum unwinding

New design
for wider applications



Product benefits at a glance:

- Axleless rolling.
- Accommodates many drum sizes.
- Stepless adjustment of the drum width.
- Fast assembly and disassembly.
- Tool-free operation.
- Light weight
- Space-saving transport
- Robust construction

The Roller Rail Plus is the cable drum axle-less unwinding device. It applicable to cable drums with a diameters 450-1600 mm and a weight of up to 1 ton per pair.


The Roller Rail Plus is characterized by a lightweight and sturdy aluminum frame with ball-bearing rollers, a front support surface, three locking positions for different drum sizes, and a roller locking function.

The compact design, light weight, and plastic handles on the sides facilitate the transport and the mounting holes allow the Roller Rail Plus to be permanently fixed with screws or temporarily secured with ground pegs on soft ground. The optional connection set supports the stability and positioning of the Cable Roller during the unwinding process, even without fixation to the ground.


Anti-slip pads ensure optimal grip on smooth surfaces. The cross-grooves on the inclined surface provide a firm grip when placing the cable drums into the Roller Rail Plus.

The rollers run on dust and dirt protected ball bearings and can be easily adjusted to three different locking positions without the need for tools.

The high side edge ensures secure drum guidance. The drum width is also infinitely adjustable. The roller locking function can be unlocked while standing, allowing for easy removal of the cable drum.

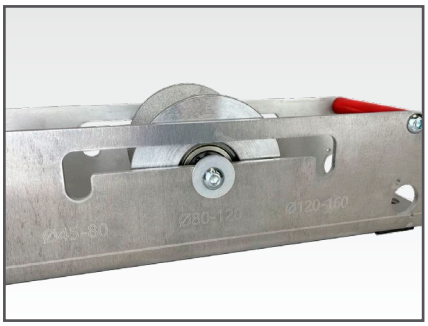



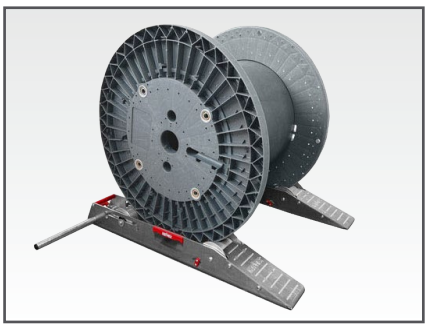

KATIMEX Cielker GmbH · Bahnhofstr. 50 · 54584 Jünkerath
Tel +49 (0) 65 97 92 77-0 · Fax +49 (0) 65 97 92 77-40 · eMail info@katimex.de
www.katimex.com

KATIMEX®
CABLING ENABLED

Product Information

Decoiler for cable drums

Roller Rail Plus




Roller Rail Plus
Aluminium roller rail for shaftless decoiling of drums. Tool-free displacement of the reel in 3 locking positions to adapt to the drum diameter. Stepless adjustment of the drum width. Simple roller locking function for drum removal.

2 pieces are needed for the application.

Cable drum Ø	450 - 1600 mm
Cable drum Ø in locking position 1:	450 - 800 mm
Cable drum Ø in locking position 2:	800 - 1200 mm
Cable drum Ø in locking position 3:	1200 - 1600 mm
Ultimate load / pair	1000 kg
Ultimate load / pair for wooden drums	800 kg
Dimension (LxWxH)	1000 x 138 x 134 mm
Weight	7.4 kg

Description	Packaging	Art.-No.
Aluminium Roller Rail Plus	1 pc	107030

Connection Set

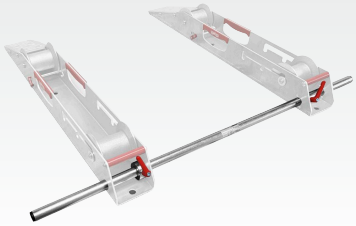

Connection-Set Roller Rail Plus
Aluminium connection tube with two clamping pieces for tool free and steplessly adjustment of the drum width. For additional stability and reliable positioning.

Dimension (LxWxH)	1190 x 50 x 96 mm
Connection tube Ø	27 mm
Wall thickness connecting tube	4 mm
Weight	7.4 kg

Description	Packaging	Art.-No.
Connection-Set Roller Rail Plus	1 pc	107031



KATIMEX Cielker GmbH · Bahnhofstr. 50 · 54584 Jünkerath
Tel +49 (0) 65 97 92 77-0 · Fax +49 (0) 65 97 92 77-40 · eMail info@katimex.de