

Digital Distance and Positioning Measuring System



Digital Distance and Positioning Measuring System incl. VGA Camera with Zoom Factor • IP40

- electronic unit and LCD fixed on the sliding parts
- extremely hardened rail made of aluminium
- feet with rubber caps (non-slip)
- large colour display with crosshair and zoom function
- LED light units with 4x white and 4x UV / black light, switchable

Elektronic


- large LCD with clear reading, digit height 14 mm
- On/Off switch, zero setting at any position, data hold function
- Preset, Origin switch
- unit switchable in mm/inch
- data transfer via WiFi or Bluetooth®
- incl. 2x 3 V battery (type CR 2032, art. no.: 90112), with operation manual

Camera (art. no. 601251)

- VGA camera sensor, camera rechargeable
- focus manually adjustable via hand wheel
- 10x zoom function (10 % steps)
- 3,5" colour display, 720 pixels
- video format AVI, photo format JPG
- Mini USB port for charging cable
- Mini SD card slot
- incl. Micro SD card, 4 GB
- incl. Micro SD card adapter for transfer to PC

Options

- data transfer via WiFi, art. no.: 2040101
- data transfer via Bluetooth®, art. no.: 2023106 + 209000, see page 272

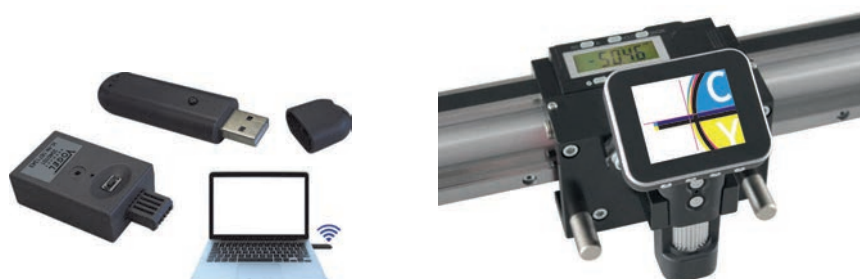


LED lighting units

- 4x white light
- 4x UV/black light
- switchable

VGA camera



bottom



ART N°	mm / inch	mm / inch	1 mW	mm	max. mm	total length mm	inclusive
102806	600 / 24	0.01 / 0.0005	1 mW	0.01	0.05	920	inclusive
102807	1000 / 40	0.01 / 0.0005	1 mW	0.01	0.06	1320	inclusive
102808	1500 / 60	0.01 / 0.0005	1 mW	0.01	0.10	1800	inclusive